

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 October 2004 (14.10.2004)


PCT

(10) International Publication Number  
**WO 2004/088157 A1**

- (51) International Patent Classification<sup>7</sup>: **F16C 11/06**
- (21) International Application Number:  
PCT/GB2004/001300
- (22) International Filing Date: 25 March 2004 (25.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0307549.6 1 April 2003 (01.04.2003) GB
- (71) Applicant (for all designated States except US):  
**MINEBEA CO. LTD.** [JP/JP]; 4106-73, Oaza Miyota, Miyota-Machi, Kitasaku-gun, Nagano 389-0293 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SMITH, Paul, Raymond** [GB/GB]; NMB-Minebea UK Ltd., Doddington Road, Lincoln LN6 3RA (GB). **GOURDOL, Jerome** [GB/GB]; NMB-Minebea UK Ltd., Doddington Road, Lincoln LN6 3RA (GB).
- (74) Agent: **FORRESTER KETLEY & CO**; Forrester House, 52 Bounds Green Road, London N11 2EY (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A SEALED SPHERICAL BEARING

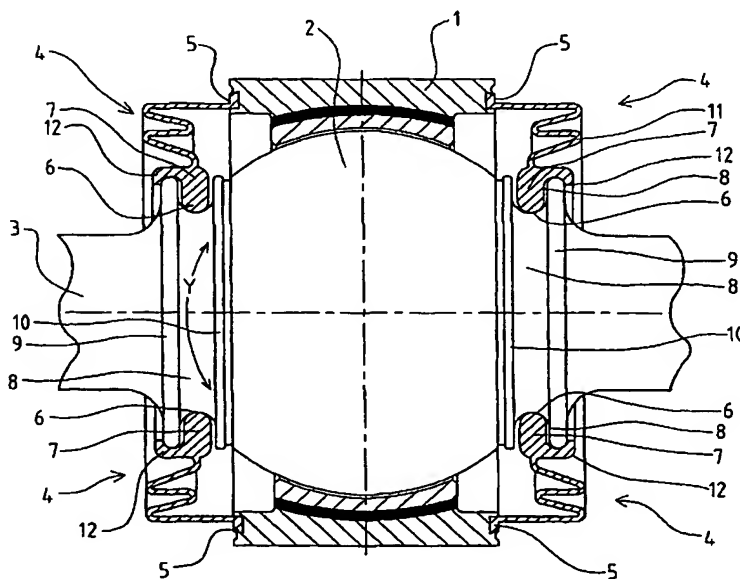

(57) Abstract: A sealed spherical bearing having a bearing housing (1), a ball (2) located therein and a ring-like seal (4) having an inner edge (6) and an outer edge (5) located between the bearing housing (1) and the ball (2), one of the edges (5, 6) having a head (7) and a skirt (12) depending therefrom, the head (7) lying in an annular groove (8) formed in one of the ball (2) or the housing (1) and the skirt (12) lying on a lip (9) upstanding from the groove (8) to define at least two sealing lines between the seal (4) and the one of the ball (2) or the housing (1), the other edge of the seal being fixedly mounted to the other of the ball (2) or the housing (1).

WO 2004/088157 A1



**Published:**

- *with international search report*
- *with amended claims*

**(15) Information about Correction:**

see PCT Gazette No. 37/2005 of 15 September 2005, Section II

**(48) Date of publication of this corrected version:**

15 September 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*